



Series Name: B4J\_BH

Pump Size: 4 x 5 x 13 BH

Department of Energy Requirements	
PE <sub>icl</sub>	0.91
Model	B4JBH
Imp. Dia. (in.)	13.50

Available Configurations	
CCMD	B4JPBH
Frame	B4JRMBH
SAE	B4JQBH

Curve Conditions	
Nominal RPM	1750
Maximum Working Pressure	266 psi (118 bar)
Based on Fresh Water @ F	68 (20 C)

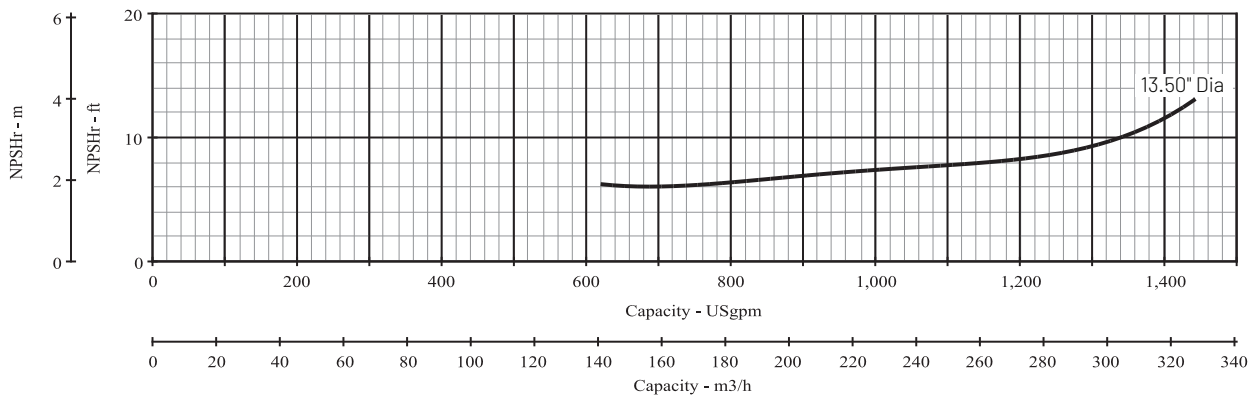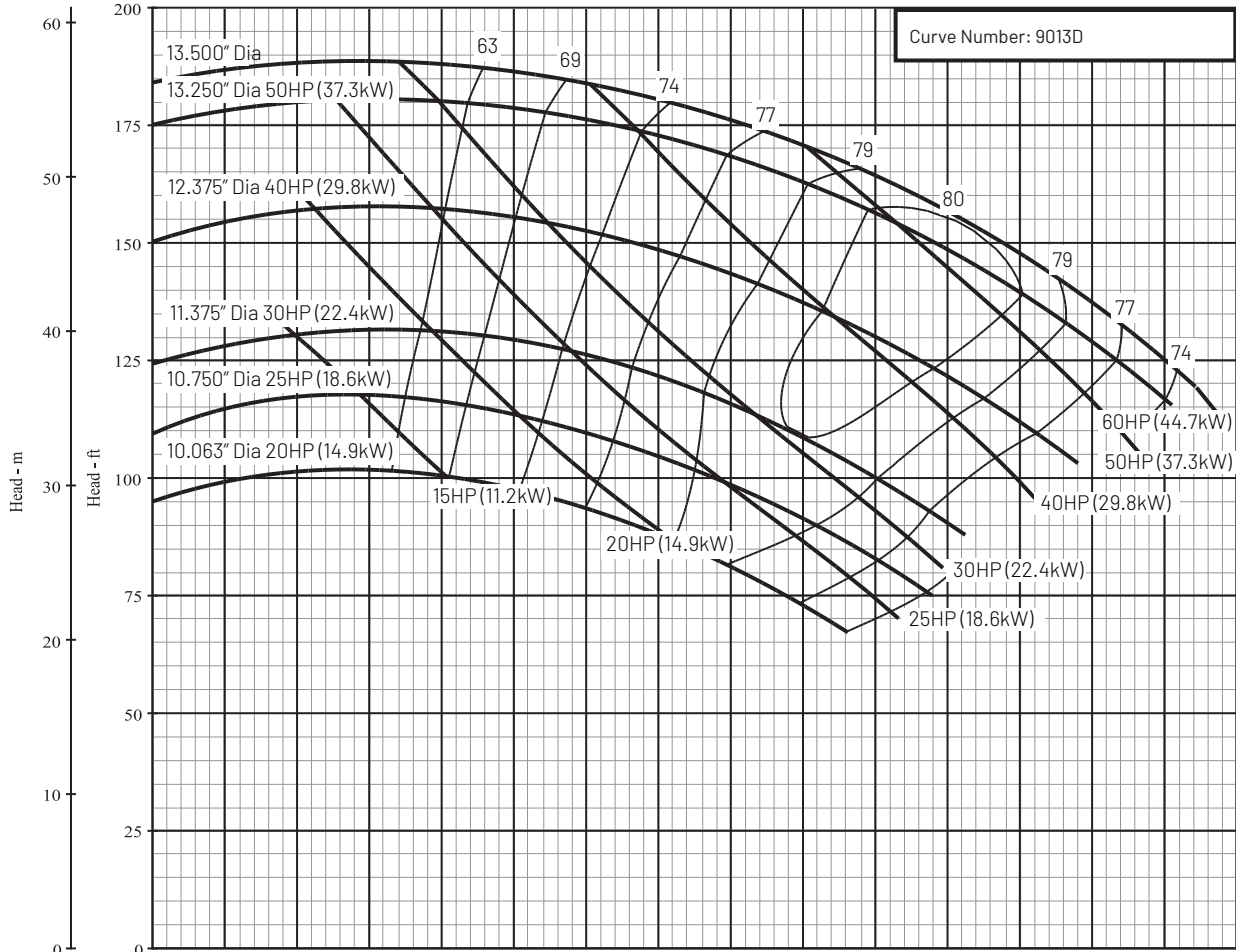


Series Name: B4J\_BH

Pump Size: 4 x 5 x 13 BH

Department of Energy Requirements	
PEI <sub>CL</sub>	0.91
Model	B4JBH
Imp. Dia. (in.)	13.50

Available Configurations	
CCMD	B4JPBH
Frame	B4JRMBH
SAE	B4JQBH

Curve Conditions	
Nominal RPM	VARIOUS
Maximum Working Pressure	266 psi (18 bar)
Based on Fresh Water @ F	68 (20 C)

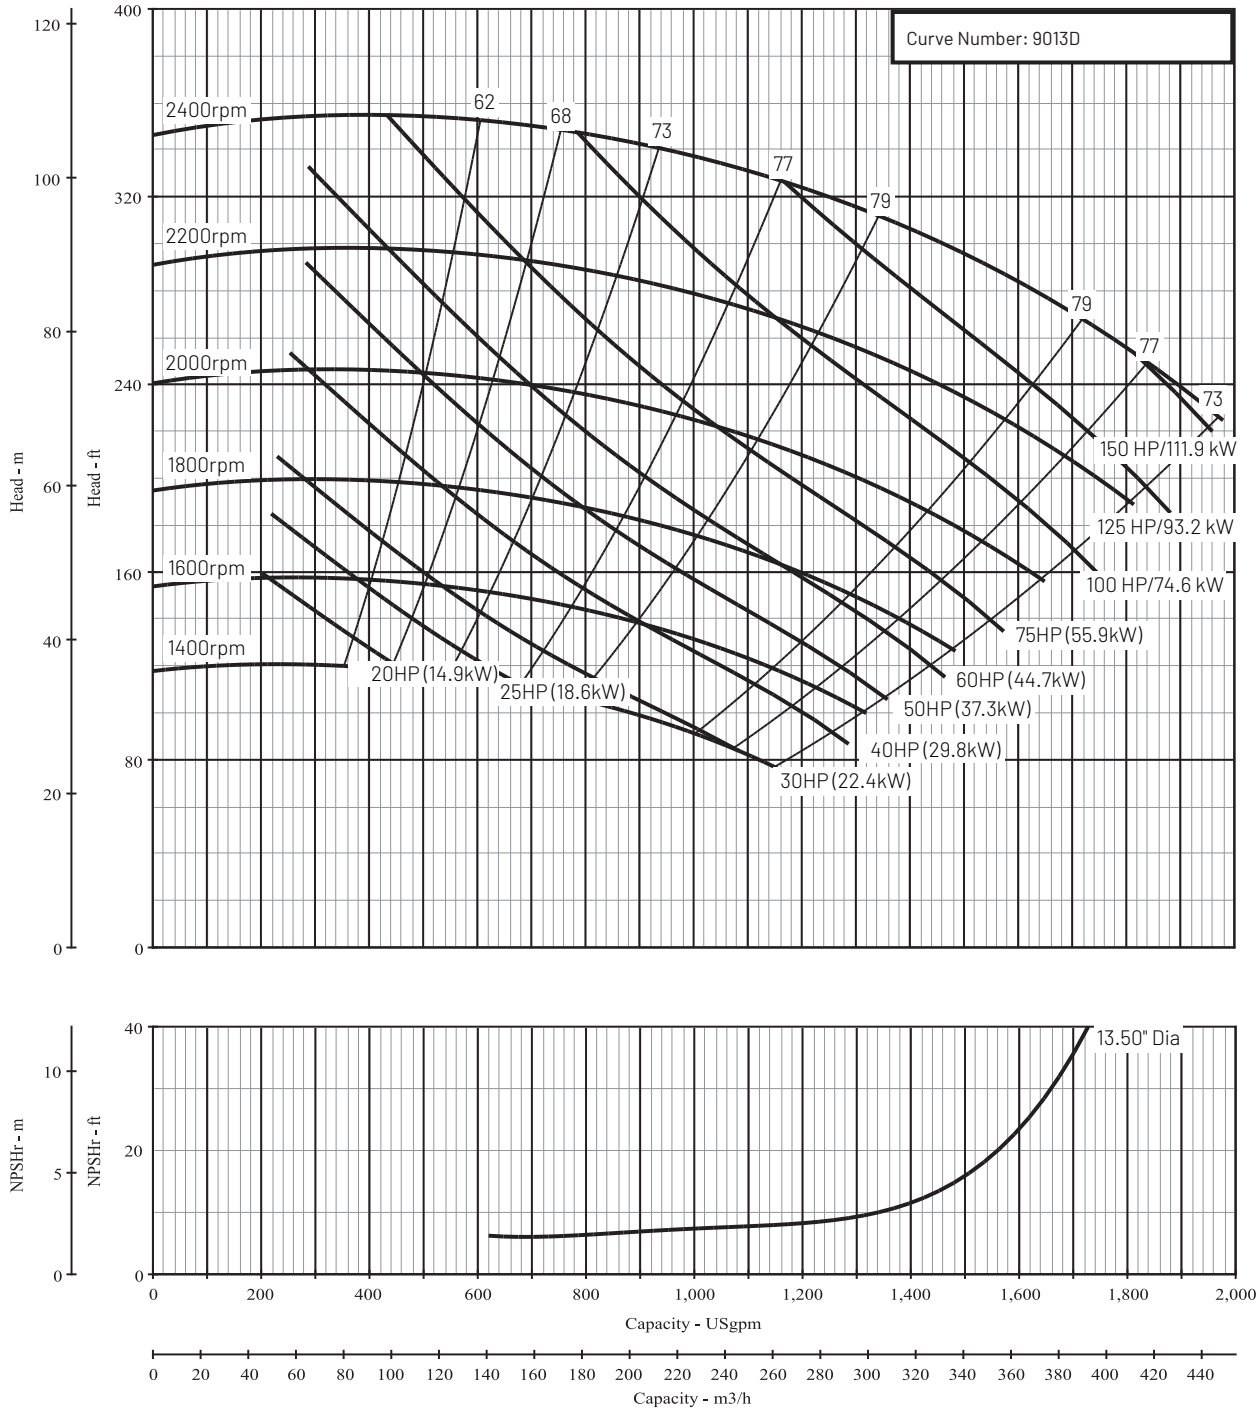

This product as sold in U.S. is regulated by 10 CFR Parts 429 and 431.

293 Wright Street | Delavan | WI 53115 | [www.BerkeleyPumps.com](http://www.BerkeleyPumps.com)

All Pentair trademarks and logos are owned by Pentair. All other brands or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

BK13003AGDDE (11/25/19) © 2019 Pentair plc. All Rights Reserved.